

IMPACT™ Shrink Film

Impact Strength When you need it most




Benefits

- **Revolutionary Engineering**
- **Beauty and Durability**
- **Versatility**
- **Extremely Tough and Multilayered Film**
- **Unmatched Clarity, Gloss and Sheen**
- **User Friendly**
- **Machineability**

Instrumented Impact Strength

ASTM #D3763

Instrumented impact strength is the index of the film's dynamic strength which approximates what will occur when the package is dropped and is useful in predicting resistance of film to breakage from dropping or other quick blows.

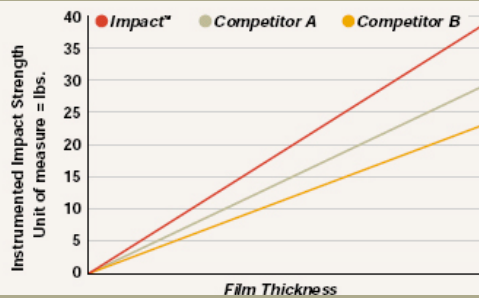

IMPACT™ Properties

	ASTM Test Method	Typical Values		
Grade/Instrumented Impact Strength (LB)		19	24	34
Yield (sq.in. per pound)		50000	40000	30000
Haze (%)	D 1003-95	3.1	3.3	3.7
Gloss (%)	D 2457-90	87	87	87
Clarity (%)	D 1746-92	86	85	81
Coefficient of Friction (film-to-film, kinetic)	D 1894-95	0.22	0.22	0.23
Water Vapor Transmission Rate (gms/100sq. In./24 hrs.)	F 1249-90	1.3	1.1	0.9
Oxygen Transmission Rate (cc/m ² / 24 hrs. @ 73 °F., 1 atm)	D 3985-95	8548	6726	4941
Tear Propagation (gms) LD* / TD**	D 1938	3.8 / 4.9	5.3 / 6.0	8.5 / 9.2
Elongation at Break (%) LD* / TD**	D 882-95	95 / 30	110 / 135	125 / 140
Minimum Use Temperature			-60°F	
Maximum Storage Temperature			90°F	
		LD*		TD**
Tensile Strength (psi)	D 882-95	17500		19000
Modulus of Elasticity (psi @ 73 °F)	D 882-95	60000		65000
Free Shrink (%) @200 °F	D 2732-83	14		20
@220 °F		22		33
@240 °F		57		60
@260 °F		77		77
Shrink Tension (psi) @200 °F	D 2838-95	350		500
@220 °F		400		570
@240 °F		440		600
@260 °F		440		535
@280 °F		420		450

* Longitudinal Direction ** Transverse Direction

This information represents our best judgement based on the work done, but the Company assumes no liability whatsoever in connection with the use of information or findings contained herein. Impact™ shrink film complies with the requirements of the Federal Food, Drug and Cosmetic Act, as amended, for the packaging of all foods, with the exception of high alcoholic, at temperatures of 65 °C and below.



Shrink Packaging Division

Sealed Air Australia Ltd.

Tel : 1 800 808 481 Fax: 1 800 250 650

Sealed Air Packaging (Shanghai) Co. Ltd.

Tel: +86 21 6375 8769 Fax: +86 21 6375 8770

Sealed Air Hong Kong Ltd.

Tel: +852 2178 7878 Fax: +852 2407 3385

Sealed Air (Korea) Ltd.

Tel: +82 2 408 5678 Fax: +82 31 763 4744

Sealed Air HK Ltd. — Indonesia Rep office

Tel: +62 21 8298 748 Fax: +62 21 8298 749

Sealed Air (Malaysia) Sdn Bhd

Tel: +60 3 7847 6988 Fax: +60 3 7847 6689

Sealed Air New Zealand

Tel: +64 9 813 9800 Fax: +64 9 813 9804

Sealed Air Philippines Ltd.

Tel: +63 2 807 3193 Fax: +63 2 809 5643

Sealed Air (Singapore) Pte. Ltd. (Co. Reg. No. 198403458K)

Tel: +65 6861 1828 Fax: +65 6861 5221

Sealed Air (India) Private Ltd.

Tel: +91 80 5117 9393 Fax: +91 80 5117 1301

Sealed Air (Taiwan) Ltd.

Tel: +886 3 324 2988 Fax: +886 3 324 3088

Sealed Air (Thailand) Ltd.

Tel: +66 2 902 0579 Fax: +66 2 902 0564

Our Products Protect Your Products®