


# EXTREMELY RUGGED HIGH PERFORMANCE CARTON TAPING MACHINES

**VIBGYOR**  
INTERNACIONAL PVT. LTD.



## UNIFORM TOP AND BOTTOM BELT DRIVE MODEL VIPL-237 UTB

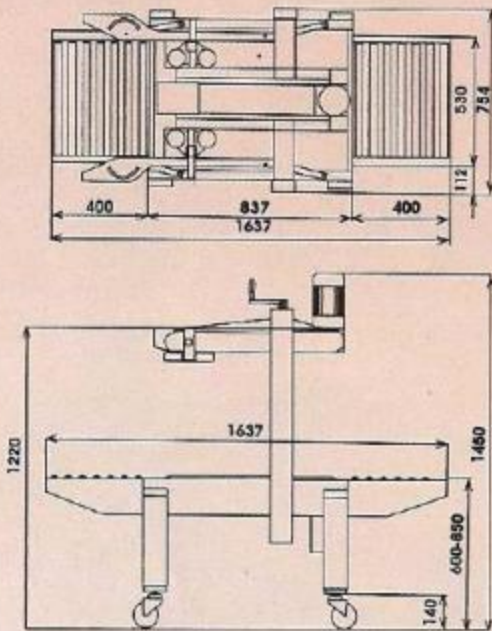

### Technical Specifications:

- Patented Taping head with BOPP Tape width : 1-1/2", 2", 3" (optional)
- Driving Belts Speed : 23 meters/minute (15-25 cartons/minute depending upon the length)
- Carton Taping Capacity :

	L	W	H
Min	120mm	140mm	120mm
Max.	No Limit	500mm	500mm
- Power input range 230V (-15%&+10%), 50hz (+2%), Single Phase with 450 Watts.
- Machine dimensions: 1637(L)X754(W) X 1375(H)mm.



### Salient Features

- Heavy duty structure with an extremely rugged design for rough industrial workig environments.
- Heavy duty Teflon castors : 4 Nos.
- In-feed & Out-feed Roller Conveyors of 400mm each with Rollers.
- Emergency stop switch ensures maximum safety for the operator and for your carton.
- Brass knurling rollers with longer trouble free performance and enhanced life.
- Adjustable machine bed height between 600-800 mm.
- Scale markings in mm on all legs for height adjustments.
- SS Guide Rails for centring the carton.
- 2 Nos Nylon Rollers - Top Squeezer each on both sides to bring the cartons Flaps closer.
- Heavy Duty deep grooved Belts with longer life for ease in movement of the cartons.
- Patented Taping head suitable for PVC/Poly Propylene/Paper Tapes.
- Tape head with pressure adjustment for Light & Strong boxes.
- Advanced Taping head with flexibility of longer leg length on either side of the carton.
- Adjustable leg length (both sides) to compensate the environment effect & to Strengthen the Carton Taping.

**A QUALITY PRODUCT FROM VIBGYOR - THE PACKAGING SPECIALIST**



**RANDOM TYPE TOP AND BOTTOM BELT DRIVE MODEL VIPL-237 RTB**

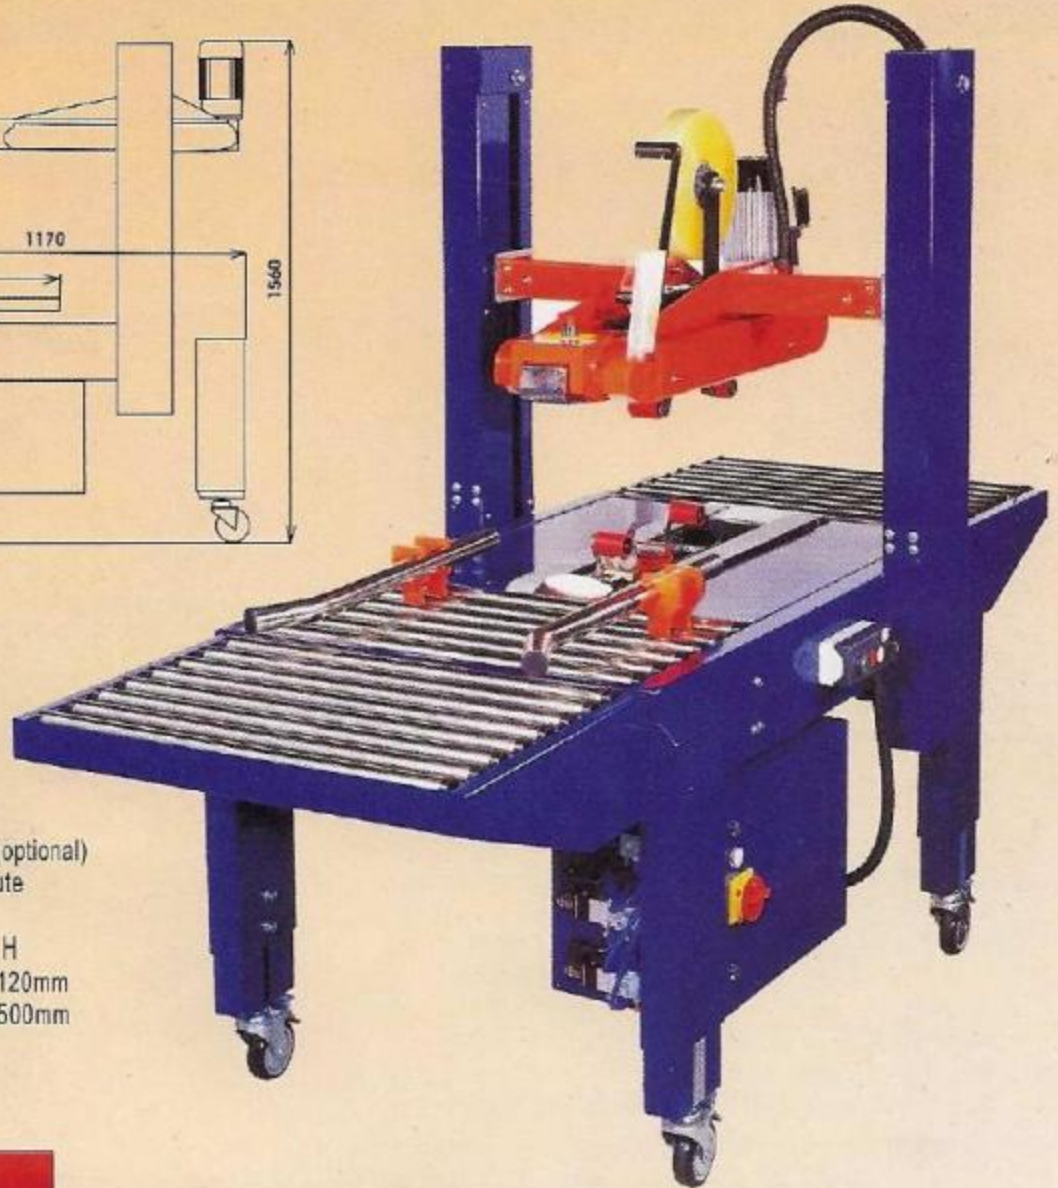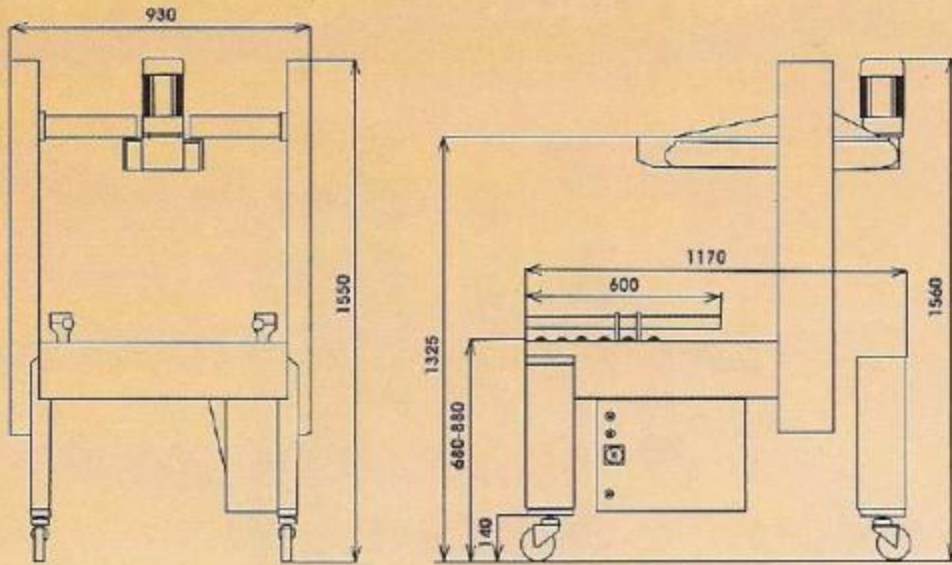

**Technical Specifications:**

- Patented Taping head with BOPP Tape width : 1-1/2", 2", 3" (optional)
- Driving Belts Speed : 23 meters/minute (9-20 cartons/minute depending upon the length)
- Carton Taping Capacity :
 

	L	W	H
Min.	120mm	140mm	120mm
Max.	No Limit	500mm	500mm
- Power input range 230V (-15%&+10%), 50hz (+2%), Single /Three Phase with 500 Watts.

**Salient Features**

- Random Machine model with automatic height and width sensing (pneumatically operated) to accomodate different sizes of the cartons in the same line.
- All other features same as uniform model VIPL-237 UTB

